

MUNICIPAL CORPORATION, HOSHIARPUR**ROUGH COST ESTIMATE****ESTIMATE FOR FIXING OF DUSTBIN AT DIFFERENT LOCALITIES, HOSHIARPUR**

Name of work:-

Justification and need of the project :-

There are 100 nos. (approx) Dustbin sets are available in MC stock. These dustbins are to be fixed at various plaeces in the city. Hence an estimate has been prepared accordingly.

Location of work:-

As mentioned in the title

Existing facility:-

Nil

Proposed facility:-

✓/Fixing Dustbins

Design criteria:-

PWD.

Specifications:-

PWD.

Rates:-

CSR Rates

Amount of Est Rs in Lac :-

1.22

Time limit:-

1 month

Source of funding:-


Corporation Fund

Previous estimate if the work is done earlier:-

It is the new estimate.No specific estimate has been prepared earlier.

Estimate has been prepared and submitted for according technical sanction and obtaining Administrative approval, please.

ਮੈਂ ਤੇ ਮੇਰੀ ਵਿਭਾਗ ਦੇ ਦੋ ਦੋ ਮੈਂ ਮੈਂ ਮੈਂ ਤੇ ਸਰਕਾਰ
ਮਕਾਮ ਵਿੱਚ ਰੱਖ ਦਿੱਤੇ ਜਾਣਗੇ।


Junior Engineer.

Submitted for according technical sanction and obtaining Administrative approval, please.


Assistant Corporation Engineer.

Technical sanction is accorded. The quantities of the estimate taken are tentative which may vary at the time of execution and rates provided in the estimate are as per the CSR rates. Some items may also differ from the estimate at the time of execution as per site conditions which shall be paid as per overall less of tendered rates. Work shall be got executed as per actual requirement and shall be paid accordingly as per lowest competitive rate after calling tenders. Submitted for obtaining Administrative approval, please.


Corporation Engineer.
25.4.17

Commissioner, Municipal Corporation.

APPROVED VIDE RESOLUTION NO. _____ DATED. _____

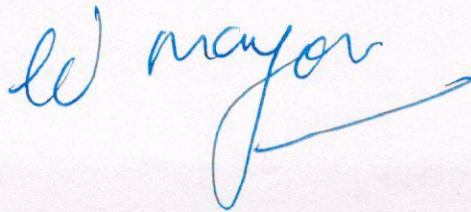

Form MW-1

MUNICIPAL CORPORATION, HOSHIARPUR

ROUGH COST ESTIMATE

ESTIMATE FOR FIXING OF DUSTBIN AT DIFFERENT LOCALITIES, HOSHIARPUR

| Sr No | CSR Item | Description of item | N | L | B | H | Contents | Unit | Rate | Per | CP % | Amount |
|--------------|----------|---|-----|-----|------|--------------------|-------------------------------|-------------------|---------|------|-----------|-----------|
| 1 | 6.2-a | Excavation of trench for laying foundation 125 stands x 3 pits = 375 | 375 | 1.5 | 1.25 | 1.5 Total or | 1054.688 1054.688 29.87 | cft cft cum | 28.17 | cum | 80 | 1514.34 |
| 2 | 10.12 | Laying C. Concrete 1:2:4 in foundation | 375 | 1.5 | 1.25 | 1.5 Total or | 1054.69 1054.69 29.87 | cft cft cum | 2759.00 | cum | 26 | 103821.39 |
| 3 | | Add carriage from office to site | 125 | | | 125 | | no. | 50 | each | | 6250.00 |
| 4 | 18.16 | Extra carriage of material from Mirthal | @ | 0.9 | | | 26.88 | cum | 308.00 | cum | | 8278.62 |
| 5 | | Contingencies | 2% | | | | | | | | | |
| Total | | | | | | | | | | | 119864.35 | |
| Total | | | | | | | | | | | 2397.29 | |
| Total | | | | | | | | | | | 122261.64 | |
| Total | | | | | | | | | | | 1.22 | |

Say Rs.

Shaw 25.4.17
Corporation Engineer
M.C.Hoshiarpur.

[Signature]
Assistant Corporation Engineer
M.C.Hoshiarpur.

[Signature]
Junior Engineer
M.C.Hoshiarpur.